



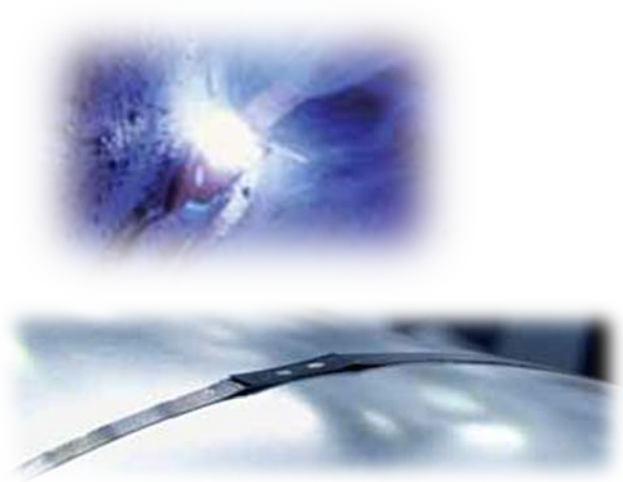

The VS 12-L series

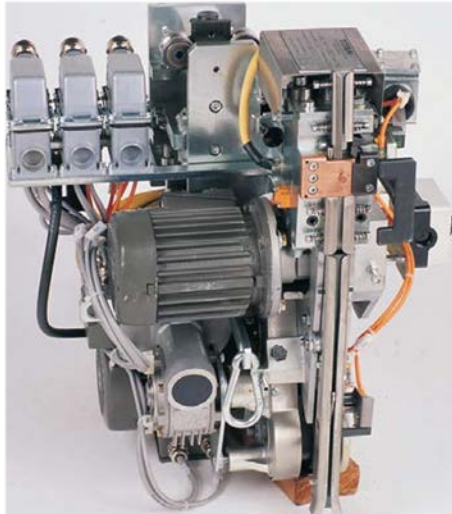

The VS 12 E-L-LD / HD Automatic Strapping Head is the ideal head for applications requiring medium strap tension and high joint efficiency. The VS 12-L Automatic Strapping Head is available either powered pneumatically or electrically.

Two versions of VS 12-L Automatic Strapping Head are available:

- The VS 12-L LD for light-duty applications creates one weld point.
- The VS 12-L HD for heavy-duty applications creates two weld points.
- Special applications for the VS 12 are encircling strapping of coils, coil strapping through the eye, slit coils, wire and tube bundles

Drive Modes	Fully electric, 200 – 240V, 50/60Hz or Electro Pneumatic 3 Motors 5 cylinders
Tensioning capacity	335 – 2250 pounds force adjustable
Strap feed speed	8.2 ft. / sec
Steel strapping Widths/Thicknesses	½ inch, 5/8 inch and ¾ inch, LD: 0.020- 0.025 inches, HD: 0.023- 0.040 inches, High tensile strap up to 0.025 inches
Min. surface VS 12 LD:	Slit Coils: 3.20 Inches Round Packs: 16 Inch OD- Ø Expansion Pack 2.80 Inches Hex Tubing Bundle 3.40 Inches
Min. surface VS 12 HD:	Slit Coils: 4.75 Inches Round Packs: 16 Inch OD- Ø Expansion Pack 4.0 Inches Hex Tubing Bundle 5.5 Inches
Seal Type	Weld joint, LD: 1 weld point, joint efficiency up to 90% of strap breaking load, depending on strap quality HD: 2 weld point, joint efficiency up to 90% of strap breaking load, depending on strap quality