




The VS 11-L strapping head series

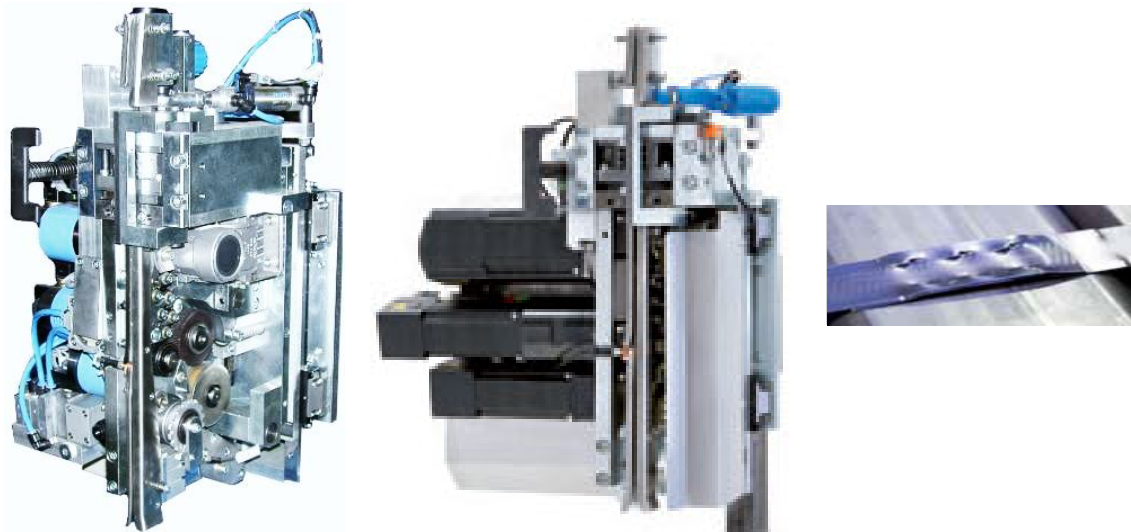

The VS 11-L strapping Automatic Strapping Heads are available in two drive versions and either light duty (two punches) or heavy duty (3 punches):

- The proven electro-pneumatic driven Automatic Strapping Head VS 11-L, providing high strap tension in a rugged design.
- The VS 11-LE is completely electric driven. A perfect combination of rugged design and precise and reliable servo drive control.
- Tensioning capacity 335 – 2000 pounds force, adjustable
- Strap feed speed 8.2 ft. sec
- Steel strapping Widths/Thicknesses 1/2 inches, 5/8 inches and 3/4 inches 0.017 inches - 0.031, high tensile strap up to 0.025 inches

Drive Modes	Fully electric, 230 VAC or Electro Pneumatic 3 Motors, 5 cylinders								
Tensioning capacity	335 – 2250 pounds force adjustable								
Strap feed speed	8.2 ft. / sec								
Steel strapping – Widths/Thicknesses	1/2 inch, 5/8 inch and 3/4 inch, LD: 0.020 inches- 0.025 inches, HD: 0.023 inches- 0.040 inches, High tensile strap up to 0.025 inches								
Min. Surface Required:	<table> <tr> <td>Expanding Pack</td> <td>4.75 inches</td> </tr> <tr> <td>Split coils</td> <td>4.75 inches</td> </tr> <tr> <td>Hex. Pipe pack</td> <td>5.50 inches</td> </tr> <tr> <td>Round Pack</td> <td>Ø 19.7 inches</td> </tr> </table>	Expanding Pack	4.75 inches	Split coils	4.75 inches	Hex. Pipe pack	5.50 inches	Round Pack	Ø 19.7 inches
Expanding Pack	4.75 inches								
Split coils	4.75 inches								
Hex. Pipe pack	5.50 inches								
Round Pack	Ø 19.7 inches								
Seal Type	Seal-less joint, LD 2 punches joint efficiency up to 60% of strap breaking load, HD 3 punches up to 85%								